




JBA | JULY 2021

FLOORING SOLUTIONS FOR SMARTER IMPACTS

# Design Standards

# Design Finishes

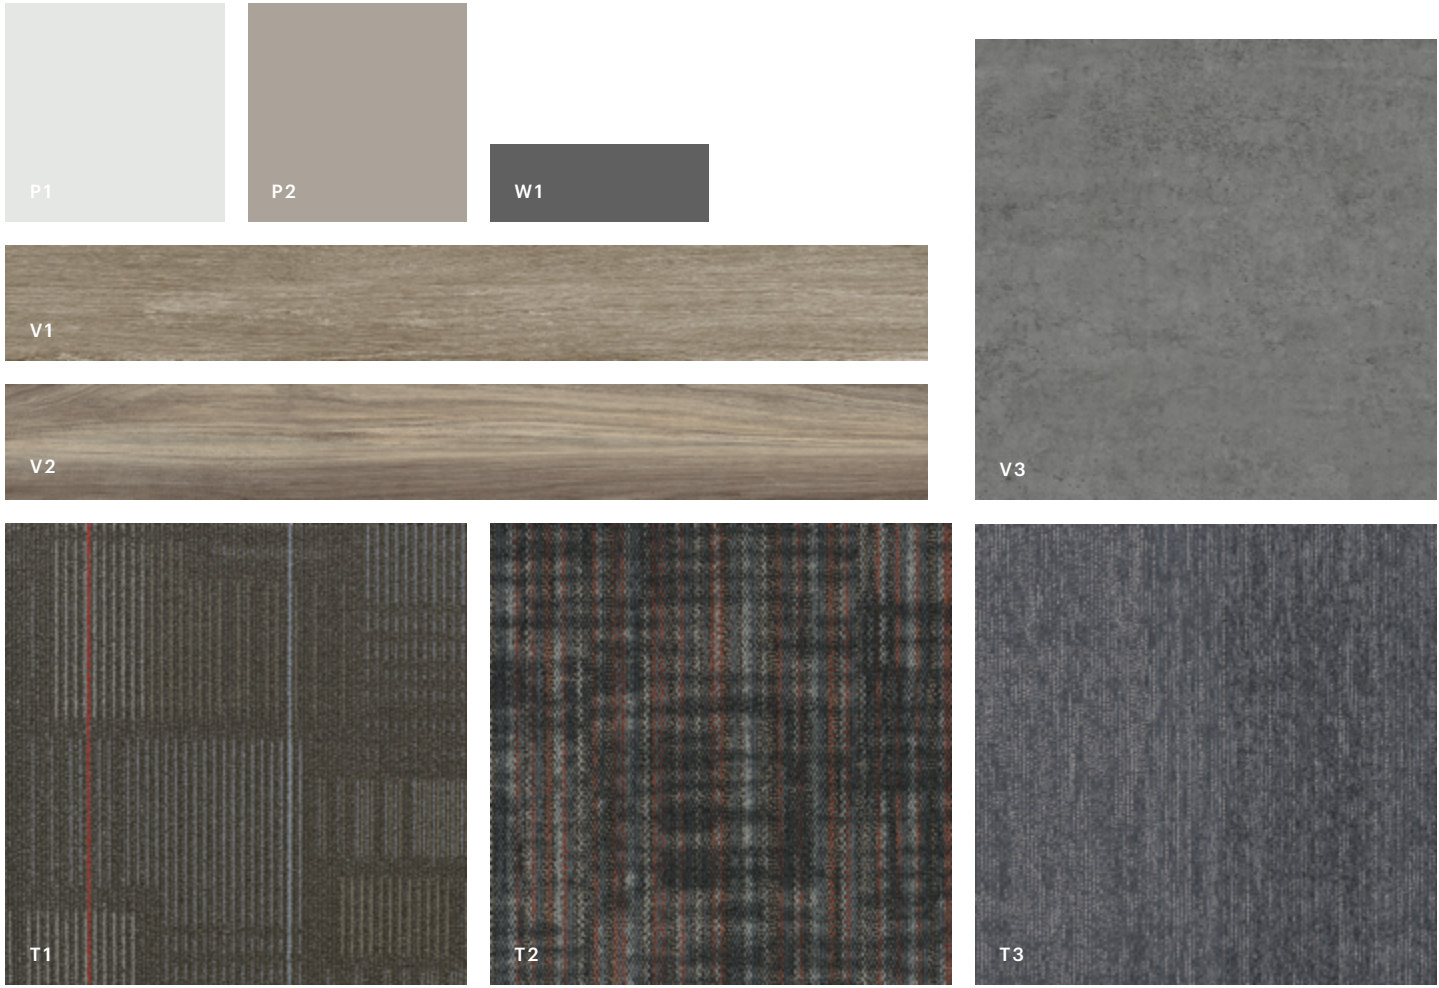

## Carpet Tile

|    |   |                |
|----|---|----------------|
| T1 | DIFFUSE STRATAWORX<br>5T419   24X24<br>ROUTES 75500     | \$13.25<br>/SY |
| T2 | CORRESPOND STRATAWORX<br>5T353   24X24<br>CONNECT 52531 | \$14.25<br>/SY |
| T3 | ARRANGE STRATAWORX<br>5T294   24X24<br>STEEL GREY 94530 | \$13.25<br>/SY |

## LVT

|    |   |               |
|----|---|---------------|
| V1 | TERRAIN II 20 MIL<br>0454V   6X48<br>TIMBER 00572 | \$2.10<br>/SF |
| V2 | TERRAIN II 20 MIL<br>0454V   6X48<br>ROOT 00568   | \$2.10<br>/SF |
| V3 | COMPOUND 2.5<br>4074V   24X24<br>CHISEL 77520     | \$2.40<br>/SF |

## Wall Base

|    |  |                  |
|----|--|------------------|
| W1 | 4" COVE BASE<br>148VS   4X120<br>NIGHT 00066 | \$87.60<br>/ROLL |
|----|--|------------------|

## Paint

|    |  |
|----|--|
| P1 | BENJAMIN MOORE (MAIN WALL)<br>MOUNTAINSCAPE 870      |
| P2 | SHERWIN WILLIAMS (ACCENT)<br>FUNCTIONAL GRAY SW 7024 |

NOTE: Pricing is for material only and effective through July 31, 2022.





DIFFUSE STRATAWORX (5T419) IN ROUTES (75500)

# ShawContract®

## Diffuse Strataworx

CARPET TILE 15 YEAR COMMERCIAL LIMITED FOR STRATAWORX


<https://qmsview.shawinc.com/viewer/doc/5975>

|                       |  |
|-----------------------|--|
| Product Type          | <b>Carpet Tile</b>   |
| Collection            | <b>Selectone</b>   |
| Style Number          | <b>5T419</b>   |
| Construction          | <b>Multi-Level Pattern Loop</b>                                |
| Fiber                 | <b>Eco Solution Q® Nylon</b>                                   |
| Dye Method            | <b>100% Solution Dyed</b>                                      |
| Primary Backing       | <b>Synthetic</b>   |
| Secondary Backing     | <b>Strataworx® Tile</b>  |
| Protective Treatments | <b>SSP® Shaw Soil Protection</b>                               |
| Recommended Adhesive  | <b>Shaw 5000, Shaw 5100, Shaw 4151, Shaw 3800 or Shaw 5036</b> |

|                         | u.s.                          | metric                        |
|-------------------------|-------------------------------|-------------------------------|
| Product Size            | <b>24 in x 24 in</b>          | <b>61 cm x 61 cm</b>          |
| Area per Carton         | <b>80 ft<sup>2</sup></b>      | <b>7.43 m<sup>2</sup></b>     |
| Pieces per Carton       | <b>20 pcs</b>                 |                               |
| Gauge                   | <b>1/12 in</b>                | <b>47.2 per 10 cm</b>         |
| Stitches                | <b>8.5 per in</b>             | <b>34.0 per 10 cm</b>         |
| Finished Pile Thickness | <b>0.092 in</b>               | <b>2.34 mm</b>                |
| Average Density         | <b>6261 oz/yd<sup>3</sup></b> | <b>0.232 g/cm<sup>3</sup></b> |
| Kilotex                 |                               | <b>9.23</b>                   |
| Total Thickness         | <b>0.230 in</b>               | <b>5.84 mm</b>                |
| Tufted Weight           | <b>16 oz/yd<sup>2</sup></b>   | <b>542.5 g/m<sup>2</sup></b>  |

Product permits installation with various dye lots.

### Recommended Installation Method

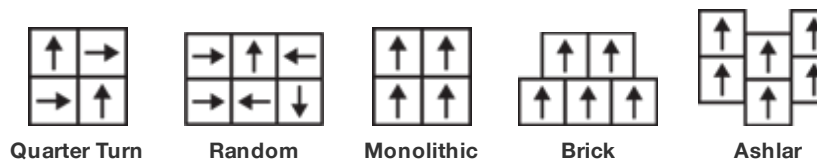

### Coordinating Products

Carpet Tile: **Poured Strataworx, Surround Strataworx**

### Performance + Testing

|                            |  |
|----------------------------|--|
| Antimicrobial Assessment   | <b>Passes (AATCC-174) (When installed using Shaw 5036 adhesive)</b>  |
| Pill Test                  | <b>Pass</b>  |
| Radiant Panel              | <b>Class I</b>   |
| NBS Smoke                  | <b>Less Than 450</b>   |
| Electrostatic Propensity   | <b>Less Than 3.5 kv</b>  |
| CRI Green Label Plus (GLP) | <b>GLP2671</b>   |
| ADA Compliance             | <b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes***</b> |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

[15 Year Commercial Limited Warranty Warranty](#)

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2021 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 21, 2021



Carpet Tile 2




# ShawContract®

## Correspond Tile

|                       |  |   |
|-----------------------|--|---|
| Product Type          | <b>Carpet Tile</b>   | CARPET TILE 15 YEAR COMMERCIAL LIMITED FOR STRATAWORX   |
| Collection            | <b>In Sync</b>   | <a href="https://qmsview.shawinc.com/viewer/doc/5975">https://qmsview.shawinc.com/viewer/doc/5975</a> |
| Style Number          | <b>5T353</b>   |   |
| Construction          | <b>Multi-Level Pattern Loop</b>                                |   |
| Fiber                 | <b>Eco Solution Q® Nylon</b>                                   |   |
| Dye Method            | <b>100% Solution Dyed</b>                                      |   |
| Primary Backing       | <b>Synthetic</b>   |   |
| Secondary Backing     | <b>Strataworx® Tile</b>  |   |
| Protective Treatments | <b>SSP® Shaw Soil Protection</b>                               |   |
| Recommended Adhesive  | <b>Shaw 5000, Shaw 5100, Shaw 4151, Shaw 3800 or Shaw 5036</b> |   |

|                         | u.s.                          | metric                        |
|-------------------------|-------------------------------|-------------------------------|
| Product Size            | <b>24 in x 24 in</b>          | <b>61 cm x 61 cm</b>          |
| Area per Carton         | <b>80 ft<sup>2</sup></b>      | <b>7.43 m<sup>2</sup></b>     |
| Pieces per Carton       | <b>20 pcs</b>                 |                               |
| Gauge                   | <b>1/10 in</b>                | <b>39.4 per 10 cm</b>         |
| Stitches                | <b>10.0 per in</b>            | <b>39.0 per 10 cm</b>         |
| Finished Pile Thickness | <b>0.079 in</b>               | <b>2.01 mm</b>                |
| Average Density         | <b>6835 oz/yd<sup>3</sup></b> | <b>0.253 g/cm<sup>3</sup></b> |
| Total Thickness         | <b>0.238 in</b>               | <b>6.05 mm</b>                |
| Tufted Weight           | <b>15 oz/yd<sup>2</sup></b>   | <b>508.6 g/m<sup>2</sup></b>  |

### Recommended Installation Method

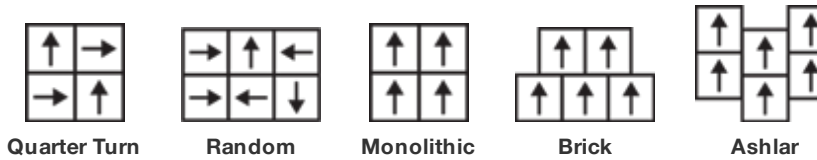

### Coordinating Products

Carpet Tile: **Companion Tile, Partner Tile**

### Performance + Testing

|                            |  |
|----------------------------|--|
| Antimicrobial Assessment   | <b>Passes (AATCC-174) (When installed using Shaw 5036 adhesive)</b>  |
| Pill Test                  | <b>Pass</b>  |
| Radiant Panel              | <b>Class I</b>   |
| NBS Smoke                  | <b>Less Than 450</b>   |
| Electrostatic Propensity   | <b>Less Than 3.5 kv</b>  |
| CRI Green Label Plus (GLP) | <b>GLP2671</b>   |
| ADA Compliance             | <b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes***</b> |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

[15 Year Commercial Limited Warranty](#)





# ShawContract®

## Arrange Tile

|                       |  |
|-----------------------|--|
| Product Type          | <b>Carpet Tile</b>   |
| Collection            | <b>Simply By Nature</b>  |
| Style Number          | <b>5T294</b>   |
| Construction          | <b>Multi-Level Pattern Loop</b>                                |
| Fiber                 | <b>Eco Solution Q® Nylon</b>                                   |
| Dye Method            | <b>100% Solution Dyed</b>                                      |
| Primary Backing       | <b>Synthetic</b>   |
| Secondary Backing     | <b>Strataworx® Tile</b>  |
| Protective Treatments | <b>SSP® Shaw Soil Protection</b>                               |
| Recommended Adhesive  | <b>Shaw 5000, Shaw 5100, Shaw 4151, Shaw 3800 or Shaw 5036</b> |

CARPET TILE 15 YEAR COMMERCIAL LIMITED FOR STRATAWORX  
<https://qmsview.shawinc.com/viewer/doc/5975>

|                         | u.s.                          | metric                        |
|-------------------------|-------------------------------|-------------------------------|
| Product Size            | <b>24 in x 24 in</b>          | <b>61 cm x 61 cm</b>          |
| Area per Carton         | <b>80 ft<sup>2</sup></b>      | <b>7.43 m<sup>2</sup></b>     |
| Pieces per Carton       | <b>20 pcs</b>                 |                               |
| Gauge                   | <b>1/10 in</b>                | <b>39.4 per 10 cm</b>         |
| Stitches                | <b>10.0 per in</b>            | <b>40.5 per 10 cm</b>         |
| Finished Pile Thickness | <b>0.121 in</b>               | <b>3.07 mm</b>                |
| Average Density         | <b>4760 oz/yd<sup>3</sup></b> | <b>0.176 g/cm<sup>3</sup></b> |
| Kilotex                 |                               | <b>8.75</b>                   |
| Total Thickness         | <b>0.246 in</b>               | <b>6.25 mm</b>                |
| Tufted Weight           | <b>16 oz/yd<sup>2</sup></b>   | <b>542.5 g/m<sup>2</sup></b>  |

### Recommended Installation Method



### Coordinating Products

Carpet Tile: **Array Tile, Offset Tile, Structure Tile**  
 Broadloom: **Amend, Accord**

### Performance + Testing

|                            |  |
|----------------------------|--|
| Antimicrobial Assessment   | <b>Passes (AATCC-174) (When installed using Shaw 5036 adhesive)</b>  |
| Pill Test                  | <b>Pass</b>  |
| Radiant Panel              | <b>Class I</b>   |
| NBS Smoke                  | <b>Less Than 450</b>   |
| Electrostatic Propensity   | <b>Less Than 3.5 kv</b>  |
| CRI Green Label Plus (GLP) | <b>GLP2671</b>   |
| ADA Compliance             | <b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes***</b> |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

[15 Year Commercial Limited Warranty](#)

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2021 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
 July 27, 2021



## Terrain II 20 Mil

RESILIENT 15 YEAR COMMERCIAL LIMITED WARRANTY


<https://pdmsview.shawinc.com/viewer/doc/5313>

|                      |   |                                 |
|----------------------|---|---------------------------------|
| Collection           | <b>Terrain II</b>                         |                                 |
| Style Number         | <b>0454V</b>                              |                                 |
| Construction         | <b>Heavy Commercial Luxury Vinyl Tile</b> |                                 |
| Class / ASTM F1700   | <b>Class III, Type B</b>                  |                                 |
| Finish               | <b>ExoGuard+™</b>                         |                                 |
|                      | U.S.                                      | Metric                          |
| Nominal Dimensions   | <b>6 in w x 48 in l</b>                   | <b>15 cm w x 122 cm l</b>       |
| Actual Dimensions    | <b>5.96 in w x 48.00 in l</b>             | <b>15.14 cm w x 121.92 cm l</b> |
| Wear Layer Thickness | <b>20 mil (0.02 in)</b>                   | <b>0.51 mm</b>                  |
| Overall Thickness    | <b>0.098 in</b>                           | <b>2.5 mm</b>                   |
| Edge Profile         | <b>Squared Edge</b>                       |                                 |
| Installation         | <b>Direct Glue</b>                        |                                 |
| Recommended Adhesive | <b>4151, LG4100 4G or S150-95</b>         |                                 |

### Packaging

|                   |                    |                  |
|-------------------|--------------------|------------------|
| Pieces per Carton | <b>21 pcs</b>      |                  |
| Area per Carton   | <b>41.72 sq ft</b> | <b>3.88 sq m</b> |
| Weight per Carton | <b>35.44 lbs</b>   | <b>16.08 kg</b>  |

### Recommended Installation Method

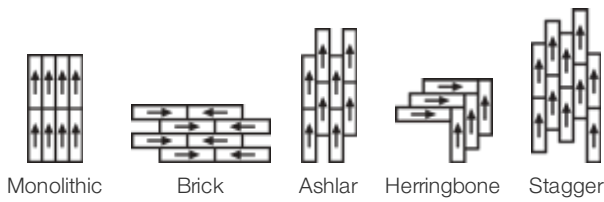

### Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm  
 COREtec: Terrain II Coretec





TERRAIN II 20 MIL (0454V) IN ROOT (00568)

# ShawContract®

## Terrain II 20 Mil

RESILIENT 15 YEAR COMMERCIAL LIMITED WARRANTY


<https://pdmsview.shawinc.com/viewer/doc/5313>

|                      |   |                                 |
|----------------------|---|---------------------------------|
| Collection           | <b>Terrain II</b>                         |                                 |
| Style Number         | <b>0454V</b>                              |                                 |
| Construction         | <b>Heavy Commercial Luxury Vinyl Tile</b> |                                 |
| Class / ASTM F1700   | <b>Class III, Type B</b>                  |                                 |
| Finish               | <b>ExoGuard+™</b>                         |                                 |
|                      | U.S.                                      | Metric                          |
| Nominal Dimensions   | <b>6 in w x 48 in l</b>                   | <b>15 cm w x 122 cm l</b>       |
| Actual Dimensions    | <b>5.96 in w x 48.00 in l</b>             | <b>15.14 cm w x 121.92 cm l</b> |
| Wear Layer Thickness | <b>20 mil (0.02 in)</b>                   | <b>0.51 mm</b>                  |
| Overall Thickness    | <b>0.098 in</b>                           | <b>2.5 mm</b>                   |
| Edge Profile         | <b>Squared Edge</b>                       |                                 |
| Installation         | <b>Direct Glue</b>                        |                                 |
| Recommended Adhesive | <b>4151, LG4100 4G or S150-95</b>         |                                 |

### Packaging

|                   |                    |                  |
|-------------------|--------------------|------------------|
| Pieces per Carton | <b>21 pcs</b>      |                  |
| Area per Carton   | <b>41.72 sq ft</b> | <b>3.88 sq m</b> |
| Weight per Carton | <b>35.44 lbs</b>   | <b>16.08 kg</b>  |

### Recommended Installation Method

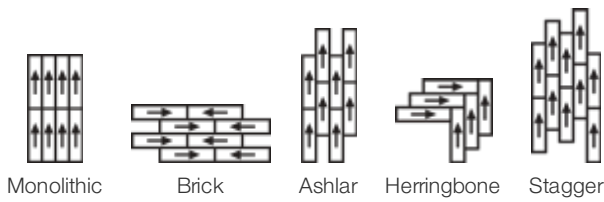

### Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm  
 COREtec: Terrain II Coretec



## Compound 2.5 Mm

RESILIENT 15 YEAR COMMERCIAL LIMITED WARRANTY


<https://pdmsview.shawinc.com/viewer/doc/5313>

|                      |   |                                |
|----------------------|---|--------------------------------|
| Collection           | <b>Compound + Cast</b>                    |                                |
| Style Number         | <b>4074V</b>                              |                                |
| Construction         | <b>Heavy Commercial Luxury Vinyl Tile</b> |                                |
| Class / ASTM F1700   | <b>Class III, Type B</b>                  |                                |
| Finish               | <b>ExoGuard+™</b>                         |                                |
|                      | U.S.                                      | Metric                         |
| Nominal Dimensions   | <b>24 in w x 24 in l</b>                  | <b>61 cm w x 61 cm l</b>       |
| Actual Dimensions    | <b>24.00 in w x 24.00 in l</b>            | <b>60.96 cm w x 60.96 cm l</b> |
| Wear Layer Thickness | <b>20 mil (0.02 in)</b>                   | <b>0.51 mm</b>                 |
| Overall Thickness    | <b>0.098 in</b>                           | <b>2.5 mm</b>                  |
| Edge Profile         | <b>Squared Edge</b>                       |                                |
| Installation         | <b>Direct Glue</b>                        |                                |
| Recommended Adhesive | <b>S150-95, LG4100 4G or 4151</b>         |                                |

### Packaging

|                   |                  |                  |
|-------------------|------------------|------------------|
| Pieces per Carton | <b>17 pcs</b>    |                  |
| Area per Carton   | <b>68 sq ft</b>  | <b>6.32 sq m</b> |
| Weight per Carton | <b>57.79 lbs</b> | <b>26.21 kg</b>  |

### Recommended Installation Method

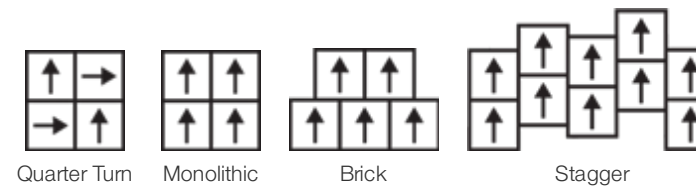

### Coordinating Products

LVT: Compound 5.0, Cast 2.5 Mm, Cast 5.0 Mm

### Performance + Testing

|   |  |  |
|---|--|--|
| Static Load (ASTM F970)                               | <b>Passes (Modified), *1000 PSI</b>  | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914)                     | <b>Passes</b>  |  |
| Resistance to Heat (ASTM F1514)                       | <b>Passes</b>  |  |
| Resistance to Light (ASTM F1515)                      | <b>Passes</b>  |  |
| Resistance to Chemicals (ASTM F925)                   | <b>Passes</b>  |  |
| Smoke Density (ASTM E662, Flaming Mode)               | <b>Passes</b>  |  |
| Radiant Panel (ASTM E648)                             | <b>Passes, Class I</b>   |  |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | <b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b> |  |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +52 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2021 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 21, 2021



# Routine Product Maintenance

The proper maintenance plan for your Shaw Contract flooring will help protect your investment by extending the life and performance of your products.

---

## Carpet

CARPET MAINTENANCE CHECKLIST

<https://pdmsview.shawinc.com/viewer/doc/6464> ▶

STEP BY STEP COMMERCIAL CARPET MAINTENANCE (ENGLISH)

<https://qmsview.shawinc.com/viewer/doc/8444> ▶

STEP BY STEP COMMERCIAL CARPET MAINTENANCE (SPANISH)

<https://qmsview.shawinc.com/viewer/doc/8446> ▶

---

## Resilient

RESILIENT MAINTENANCE CHECKLIST

<https://pdmsview.shawinc.com/viewer/doc/3361> ▶

STEP BY STEP COMMERCIAL RESILIENT MAINTENANCE (ENGLISH)

<https://qmsview.shawinc.com/viewer/doc/8445> ▶

STEP BY STEP COMMERCIAL RESILIENT MAINTENANCE (SPANISH)

<https://qmsview.shawinc.com/viewer/doc/8447> ▶





# ShawContract®

shawcontract.com

## Thank You.

### Contacts:

#### Melissa Smith

Account Manager

Shaw Integrated Solutions

melissa.smith2@shawinc.com

o: 706.532.7408

#### Rebecca Crosby

Senior Account Manager

Jacksonville & NE Florida

rebecca.crosby@shawcontract.com

m: 904.517.3308

#### Jay Loughran

Vice President Strategic Account

Southeast

jay.loughran@shawinc.com

m: 615.752.9691

### Customer & Product Support:

1.800.257.SHAW (7429)

www.shawcontract.com

### Maintenance & Technical Support:

technicalsupport.shawinc.com